


## SC-30 Resonant Scanner

The SC-30 fixed-frequency resonant optical scanner is an electromagnetically driven moving mirror device which deflects a light beam with a sinusoidal motion. The mirror assembly is attached to a torsion spring. The scanning frequency range of the SC-30 scanner is from 200 Hz to 16 kHz, fixed at any one value within the range. The scan angle is inversely proportional to the frequency and is a function of mirror size. Operation at the resonant frequency is sustained by a feedback amplifier and driver, supplied separately.

### FEATURES AND ADVANTAGES

- One fixed frequency up to 16 kHz
- Bi-directional scanning possible to double the frequency
- No lubrication needed, maintenance free
- Mirror size up to 25 mm x 25 mm
- Scan angle up to 30° peak-to-peak optical
- Small size/lightweight
- Low power heat dissipation
- Low power drive electronics
- Rugged, no wearing parts
- High reliability, long life
- High frequency stability
- Withstands shock and vibration
- Ultra-high vacuum operation<sup>1</sup>
- High/low temperature operation<sup>1</sup>
- Jitter free operation
- No radiated electromagnetic interference (EMI)
- Mirror position signal available
- Glass mirrors standard, metal mirrors, prisms, or lenses optional<sup>1</sup>

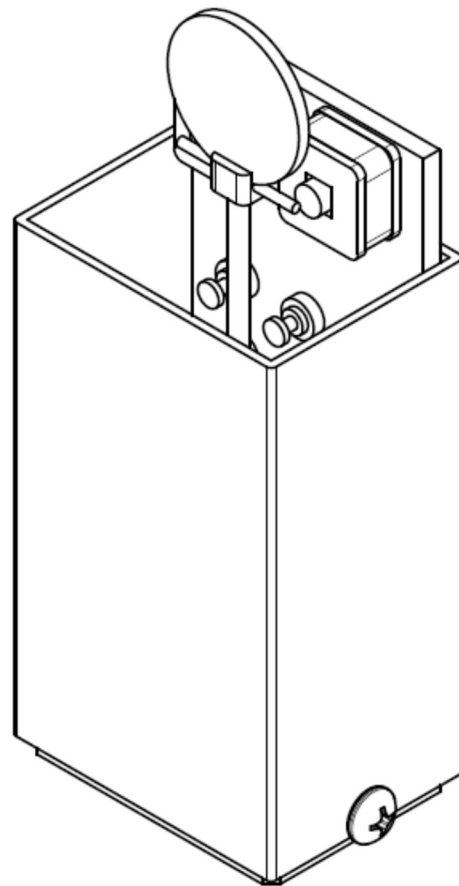

<sup>1</sup> Available on special order

# SC-30 Resonant Scanner

## SPECIFICATIONS

### Mechanical

<b>Frequency range</b>	200 Hz to 16 kHz
<b>Scan angle</b>	Up to 30° peak-to-peak optical, as a function of frequency and mirror size
<b>Frequency accuracy</b>	±2% at 25 °C, closer accuracy available upon request
<b>Scanner weight</b>	40 grams

### Electrical


<b>Drive coil resistance (Ω)</b>	17.5, 25, 75, 150, or 300, as a function of frequency
<b>Sense coil resistance (Ω)</b>	2,000

### Mirror

<b>Size</b>	Up to 25 mm x 25 mm, as a function of frequency
<b>Thickness</b>	1.0 mm; other thickness values available
<b>Surface quality</b>	60-40 scratch and dig

*Typical scan frequency as a function of angle and mirror size.*

<b>Frequency</b> (Hz)	<b>Scan Angle</b> (PTP Deg Optical)	<b>Mirror Size</b> (L x H mm)
500	35°	20 x 20
1,000	25°	15 x 10
2,000	20°	10 x 10
4,000	20°	8 x 9
5,000	20°	7 x 8
6,000	16°	6 x 7
8,000	16°	5 x 6
10,000	10°	4 x 5
12,000	8°	4 x 5
15,000	6°	4 x 5
16,000	6°	3 x 4

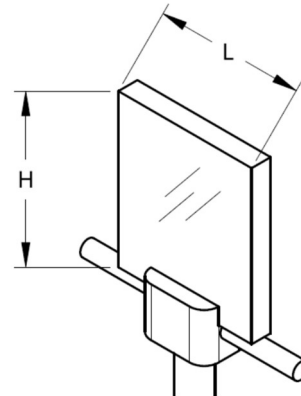


# SC-30 Resonant Scanner

## CONTROL SIGNALS

The SC-30 includes a 4-pin female Molex connector (PN 22-01-3047 or equivalent) for signal transmission.

Pins 1 and 4 receive a drive signal at the scanner's resonant frequency. Pins 2 and 3 output a sense signal relating to the mirror's position.

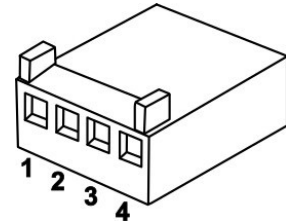

## DRIVERS

EOPC manufactures the following specialized drivers to operate the SC-30.

**AGC Driver:** Provides superior amplitude stability (0.01%), the AGC driver provides a sine wave reference signal for position output, TTL level square wave reference signal, and adjustment of the phase relationship between the mirror position and output signals.


**PLD-1S Driver:** Achieves synchronization to an external clock input. Perfect for scenarios where synchronization of the scanner to other system components is paramount.

**PLD-2S Driver and PLD-2SXY Driver:** These two drivers enable synchronized operation of two scanners, creating patterns such as circles, ellipses, and raster scans.



# SC-30 Resonant Scanner

## DRAWINGS

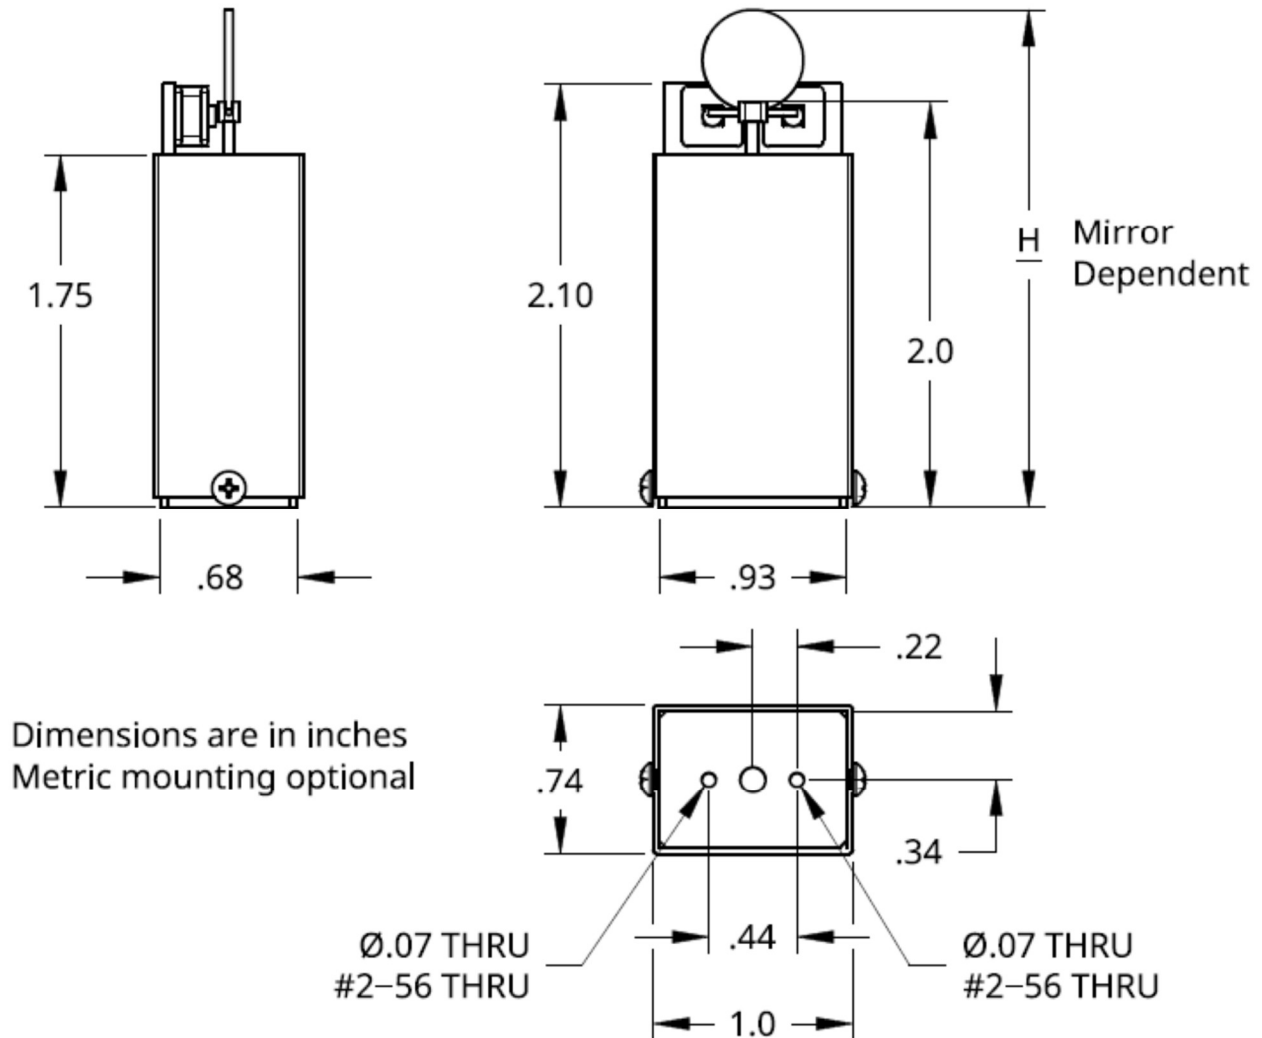

## ORDERING INFORMATION

TYPE [SC-30]; MIRROR SIZE [mm]; (MIRROR TYPE [Al-Aluminum, Ag-Silver, Au-Gold]);  
ANGLE [P-P Deg. optical]; FREQUENCY [Hz]

Example: PART NO. SC30-4x5(Ag)-6-16000. This part number specifies the model SC-30 scanner, a 4x5mm silver mirror, a 6° peak to peak optical scan angle and a 16kHz operating frequency.

---

# SC-30 Resonant Scanner

## IMPORTANT NOTICE AND DISCLAIMER

EOPC PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with EOPC products. You are solely responsible for (1) selecting the appropriate EOPC products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. EOPC grants you permission to use these resources only for development of an application that uses the EOPC products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other EOPC intellectual property right or to any third party intellectual property right. EOPC disclaims responsibility for, and you will fully indemnify EOPC and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

EOPC’s products are provided subject to EOPC’s Terms of Sale or other applicable terms available either on [eopc.com](http://eopc.com) or provided in conjunction with such EOPC products. EOPC’s provision of these resources does not expand or otherwise alter EOPC’s applicable warranties or warranty disclaimers for EOPC products.

EOPC objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Electro-Optical Products, Corporation, 939 S. Andreasen Drive,  
Escondido, CA 92029, USA

Copyright © 2025, Electro-Optical Products, Corporation